
PUMP RANGE TERMOMECCANICA POMPE







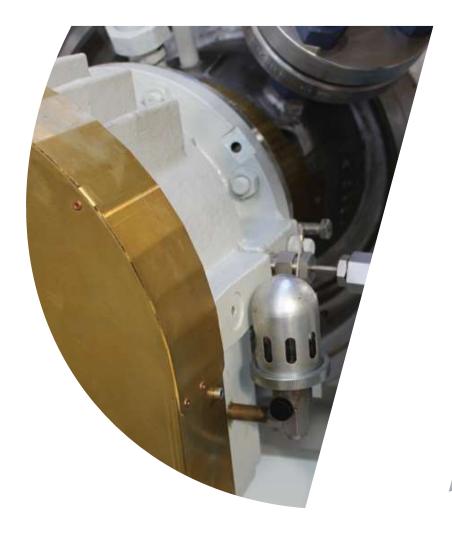

TERMOMECCANICA POMPE

A UNIQUE PUMP PARTNER FOR YOUR PLANT PROJECTS

With its 110 years of experience, Termomeccanica Pompe, who recently joined the Trillium Flow Technologies group, is a unique technological partner offering highly integrated engineered pumps solutions tailored to its customers specific project needs, especially in terms of efficiency and reliability.

Termomeccanica Pompe's engineered pumps solutions are not limited to original equipment design and manufacturing but also cover the provision of an extensive portfolio of after-sales service activities for the Oil & Gas, Water, Desalination, Power Generation, and other industrial sectors.

OIL & GAS

Termomeccanica Pompe offers a wide range of API 610 engineered pumps in compliance with the most stringent technical specifications of the Upstream, Midstream and Downstream sectors. The company's pump range covers the most demanding services of the industry such as those related to onshore & offshore water injection plants, oil pipelines, LNG terminals, refineries & petrochemical plants.

WATER

The history of Termomeccanica Pompe is closely linked to the handling & transmission of medium & large masses of water. With its product range, the company covers all main and auxiliary services in Potable Water, Irrigation, Land Reclamation, Water Treatment as well as other industrial plants.

DESALINATION

Termomeccanica Pompe's product offering covers all process and water intake services related to the various desalination technologies: latest-generation SWRO, MSF, and MED.

POWER GENERATION

Termomeccanica Pompe provides pumps for all types of power plants - i.e. conventional steam, combined cycle, geothermal and nuclear - covering all main and auxiliary services such as boiler feed water, condensate extraction, circulating cooling and close circuit cooling.



YOUR PUMP PARTNER, YESTEDAY, TODAY AND TOMORROW

TRILLIUM FLOW TECHNOLOGIES™ PUMP RANGE 3







Gabbioneta Pumps®

Vertical Multistage Pumps

VBN - VBN DS Range

General information

The VBN and VBN-DS range heavy duty process pumps, available in double-casing or wet pit configurations, are vertical multistage, diffuser type pumps designed for full compliance with latest edition of API 610 Standard.

A wide range of sizes, number of stages and material combinations complete the variety of the offered products.

Main design features:

- Geometry of pump components optimised through hydraulic, structural, thermal and dynamic F.E.M. analysis to guarantee high product reliability
- To avoid seizures correlated to dangerous resonances, the F.E.M. dynamic analysis is carried out on all manufactured pumps taking into account the proper site operating conditions
- Closed type impeller with front and rear wear rings as well as balancing holes, to minimise the axial thrust
- Large eye single suction or double suction 1st stage impeller to meet low NPSH requirements
- Deep stuffing boxes, designed in accordance to API 682 Standard, suitable to accept any type of mechanical or packing seal

Options

The following pump designs can be provided:

- Air fan cooling system provided on bearing bracket and/or mechanical seal when required by hot temperature applications
- Additional rigid coupling to facilitate mechanical seal maintenance activities
- Inside drain line
- Axial thrust tilting pad bearings for ultra high thrust operating condition
- Anti reverse rotation device
- Special bearing isolators at both bearing housing ends
- Oil mist lubrication (pure or purge)
- Temperature and/or vibration detection and monitoring equipment

Main pumps applications refer to heavy duties on

- Oil & Gas
- Fluid transportation
- Pipeline
- Hydrocarbon booster
- Condensate extraction

- Labyrinths and deflectors at both bearing housing to maximise protection against dirt
- Number of stages rangeable from 1 to 14
- Pump shaft in one or two pieces, fully machined to respect the more restrictive run-out API limits
- Air fan cooling system provided on bearing bracket and [or mechanical seal when required by hot temperature applications
- Rotor axial thrust supported by a duplex oillubricated ball angular contact type bearing as a standard
- Renewable bushings provided at all interstage casings and columns.

Operating data

Capacity

up to 2000 m³/h (8800 USgpm)

Head

up to 2000 m (6500 feet)

Temperature

from -150°C (-240°F) to 400°C (750°F)


Design working pressure

up to 210 barg (3000 psig)

Rotational speed

up to 3800 rpm


Coverage Chart

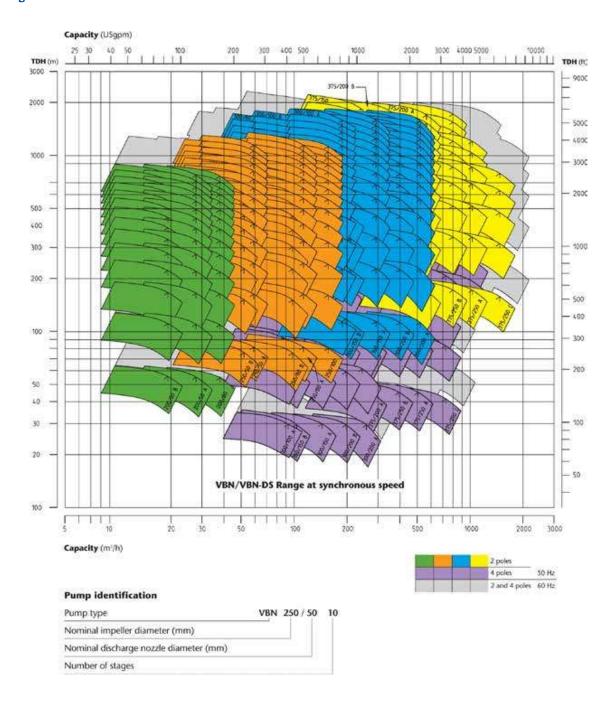

Overall dimensions


General notes

- 1. All dimensions are in mm. Do not use for construction unless certified.
- 2. Dimensions G and I vary with driver selection.
- 3. Dimensions L and U depending on purchaser requirement.

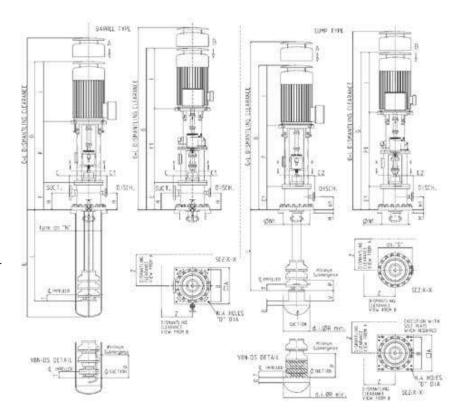

PUMP Type VBN	NOZZLE SIZE	A	В	С	C1	C2	D	E	E1	F Max	F1 Max	Н	H1	L Min	M	N	N1	0	P	R	S Ansi 150rf	т	U Min	v	Z
200/50 VL	4"/2"	700	620	375	325	325	30	525	450	1070	1360	300	250	618	70	14"	340	100	270	18"	16"	104	900	200	1200
200/50	4"/2"	700	620	375	325	325	30	525	450	1070	1360	300	250	618	70	16"	390	100	270	18"	16"	104	900	200	1200
200/80	4"/3"	700	620	375	325	325	30	525	450	1070	1360	300	250	618	70	16"	390	100	270	18"	16"	104	900	200	1200
250/50	4"/2"	700	620	375	350	350	30	525	450	1120	1425	325	250	655	70	20"	440	100	300	20"	18"	123	900	200	1200
250/80	4"/3"	700	620	375	350	350	30	525	450	1120	1425	325	250	655	70	20"	440	100	300	20"	18"	123	900	200	1200
250/100	6"/4"	700	620	375	350	350	30	525	450	1120	1425	325	250	655	70	20"	440	130	300	20"	18"	123	900	200	1200
300/80	4"/3"	900	820	500	475	475	30	650	600	1285	1625	400	350	748	70	28"	590	150	400	26"	24"	134	1000	200	1500
300/100	6"/4"	900	820	500	475	475	30	650	600	1285	1625	400	350	748	70	28"	590	150	400	26"	24"	134	1000	200	1500
300/150	8"/6"	900	820	500	475	475	30	650	600	1285	1625	400	350	748	70	28"	590	150	400	26"	24"	134	1000	200	1500
300/200	10"/8"	900	820	500	475	475	30	650	600	1285	1625	400	350	748	70	28"	590	200	400	26"	24"	134	1000	200	1500
350/150	8"/6"	900	820	500	475	475	30	650	600	1285	1625	400	350	770	70	28"	640	150	400	28"	26"	180	1000	200	1500
375/150	8"/6"	1200	1100	675	650	650	36	800	800	1285	1625	450	450	820	70	34"	740	150	500	32"	30"	168	1000	200	1500
375/200	10"/8"	1200	1100	675	650	650	36	800	800	1425	1750	450	450	820	70	34"	740	200	500	32"	30"	168	1000	200	1500
375/250	12"/10"	1200	1100	675	650	650	36	800	800	1425	1750	450	450	820	70	34"	740	200	500	32"	30"	168	1000	250	1500
375/250C	14"/10"	1200	1100	700	650	650	36	800	800	1425	1750	450	450	820	70	34"	740	200	600	32"	30"	268	1000	250	1500

PUMP Type VBN - DS	NOZZLE SIZE	A	В	С	C1	C2	D	E	E1	F Max	F1 Max	Н	Н1	L Min	M	N	N1	0	P	R	S Ansi 150rf	Ţ	U Min	V	Z
250/80	4"/3"	700	620	375	350	350	30	525	450	1120	1425	325	250	655	70	20"	440	100	400	20"	18"	143	900	-	1200
250/100	6"/4"	700	620	375	350	350	30	525	450	1120	1425	325	250	655	70	20"	440	100	400	20"	18"	143	900	-	1200
300/80	4"/3"	900	820	500	475	475	30	650	600	1285	1625	400	350	748	70	28"	590	150	500	26"	24"	178	1000	-	1500
300/100	6"/4"	900	820	500	475	475	30	650	600	1285	1625	400	350	748	70	28"	590	150	500	26"	24"	178	1000	-	1500
300/150	8"/6"	900	820	500	475	475	30	650	600	1285	1625	400	350	748	70	28"	590	150	500	26"	24"	178	1000	-	1500
300/200	10"/8"	900	820	500	475	475	30	650	600	1285	1625	400	350	748	70	28"	590	200	500	26"	24"	178	1000	-	1500
375/150	8"/6"	1200	1100	675	650	650	36	800	800	1285	1625	450	450	820	70	34"	740	150	625	32"	30"	224	1000	-	1500
375/200	10"/8"	1200	1100	675	650	650	36	800	800	1425	1750	450	450	820	70	34"	740	200	625	32"	30"	224	1000	-	1500
375/250	12"/10"	1200	1100	675	650	650	36	800	800	1425	1750	450	450	820	70	34"	740	200	625	32"	30"	224	1000	-	1500
375/250C	14"/10"	1200	1100	700	650	650	36	800	800	1425	1750	450	450	820	70	34"	740	200	850	32"	30"	454	1000	-	1500

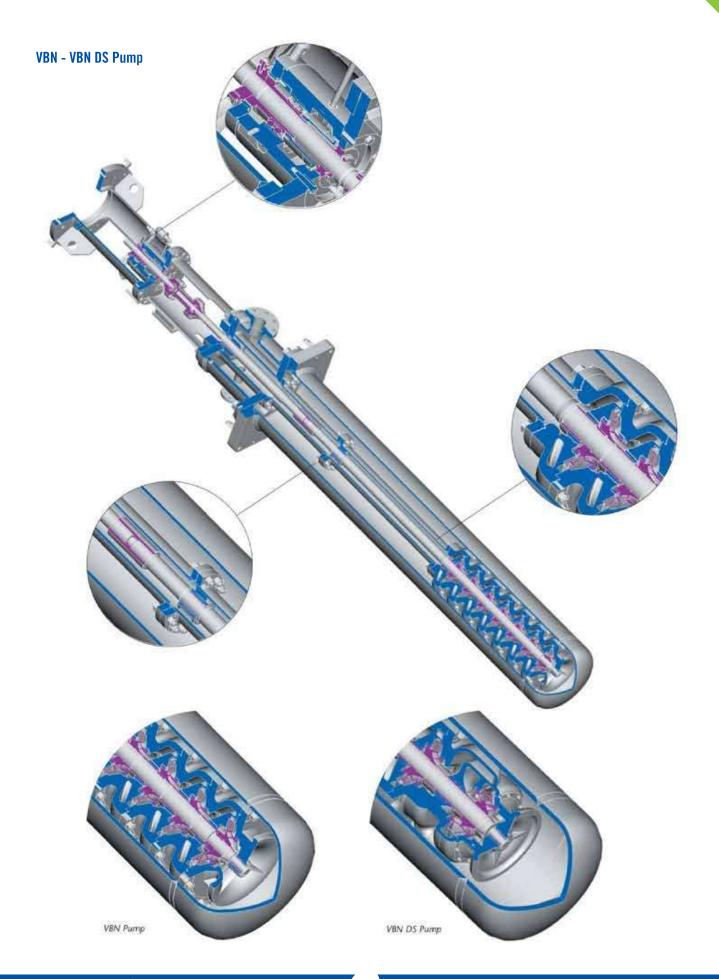

A century of experience

Since the foundation of the company in 1897, Gabbioneta Pumps® has been engaged in design and manufacture of high quality centrifugal pumps.

The products and the markets served progressively changed from water to chemical industry and finally, in the last thirty years, to API 610 heavy duty pumps for refinery and petrochemical industries.

Product development is based on a thorough interchange of marketing and operating experience within the company and in close cooperation with project and plant engineers.

Manufacturing is carried out in a factory equipped with several modern CNC machines and machine tools. Special note has to be given to the machining centers where pump casings can be machined completely with only two settings.

In-house facilities are designed to meet the performance and NPSH testing requirements of all pumps manufactured in the company in full compliance with API 610 Standards.

A quality assurance system certified in accordance with ISO 9001 ensures Gabbioneta Pumps® are of the highest quality.



VBN pumps in Gabbioneta test room



Trillium Pumps Italy S.p.A. Società Unipersonale

Gaetana Agnesi 1, 20834 Nova Milanese (MB), Italy T: +39 0362 17331; Fax: +39 0362 1733209; E: gabbioneta.sales@trilliumflow.com

www.trilliumflow.com Certified: ISO 9001:2015, ISO 14001:2015, 0HSAS 18001:2007